COOKING

MODEL	SINGLE OVENS									
	ZBP1165X	ZBS1063X	ZBS963X	ZBQ865N ZBQ865W ZBQ865X	ZBQ465X	ZBF569SW ZBF569SX	ZBF560X	ZBF360B ZBF360W ZBF360X	ZBF260W ZBF260X	ZOB160W ZOB160X
OVEN FUNCTIONS (t = top, m = main)										
Thermaflow® fan operated cooking	■	■	■	■	■	■	■	■	■	-
Fan assisted cooking	-	-	-	-	-	-	-	-	-	-
Thermal grilling	■	■	■	■	-	■	■	-	-	-
Conventional cooking	■	■	■	■	-	-	-	-	-	■
Pizza setting	■	■	-	-	-	-	-	-	-	-
Booster	■	■	-	-	-	-	-	-	-	-
Fan controlled defrosting	■	■	■	■	■	■	■	■	■	-
80° Keep warm	-	-	-	-	-	-	-	-	-	-
Full width grill	■	■	■	■	■	■	■	-	-	■
Economy grill	■	■	■	■	■	■	■	■	■	■
Bottom heat - reheat	■	■	■	■	-	-	-	-	-	■
Top heat browning	■	■	■	■	-	-	-	-	-	■
OVEN FEATURES										
Oven door(s) (Q = quadruple T = triple, D = double)	Q	D	D	D	D	D	D	D	D	D
Interior lights Watts	1 x 40	1 x 15	1 x 15	1 x 15	1 x 15	1 x 15	1 x 15	1 x 15	1 x 15	1 x 15
Interior lights Position	Back	Back	Back	Back	Back	Back	Back	Back	Back	Back
Digital Touch Controls	■	-	-	-	-	-	-	-	-	-
Digital Push Button Controls	-	■	-	-	-	-	-	-	-	-
Retractable controls	-	-	-	■	-	-	■	-	-	-
Rotary controls	-	-	■	-	■	■	-	■	■	■
Controls behind glass	-	-	-	■	■	-	-	-	-	-
Digital display	■	■	-	-	-	-	-	-	-	-
Digital Temperature Control	■	■	-	-	-	-	-	-	-	-
Compact hinge	■	■	■	■	■	■	■	■	■	■
Cooling fan	■	■	■	■	■	■	■	■	■	■
Easy installation - side handles and stability feet	■	■	■	■	■	■	■	■	■	■
PROGRAMMER										
Mechanical minute minder	-	-	-	-	-	-	-	-	■	-
Fully programmable electronic clock & minute minder	■	■	■	■	■	■	■	■	-	-
Digital controls with menu guided cooking	■	■	-	-	-	-	-	-	-	-
CLEANING										
Pyrolytic oven cleaning 2)	■	-	-	-	-	-	-	-	-	-
Catalytic lining / liners	-	■	■	■	■	■	■	-	-	-
Easy clean enamel interior	-	-	-	-	-	-	-	■	■	■
Fold down grill	-	-	-	-	-	-	-	-	-	-
EQUIPMENT SUPPLIED										
Telescopic runners	Optional	Optional	Optional	Optional	Optional	■	Optional	-	-	-
Chrome grid runners	■	■	■	■	■	■	■	-	-	-
Chrome auto-stop non-tip shelves	2	2	2	2	2	2	2	2	2	2
Grill pan	■	■	■	■	■	■	■	■	■	■
INTERNAL OVEN DIM. (t = top, m = main)										
Volume (usage) litres	53	53	53	53	53	53	53	53	53	53
Height mm	335	335	335	335	335	335	335	335	335	335
Width mm	395	395	395	395	395	395	395	405	405	405
Depth mm	400	400	400	400	400	400	400	400	400	410
ENERGY INFORMATION										
Oven temperature range °C	50-250	50-250	50-230	50-230	50-230	50-230	50-230	50-230	50-230	50-230
Energy class	A	A	A	A	A	A	A	A	A	A
Energy efficiency class in mode Static/Fan	F	F	F	F	F	F	F	F	F	S
Cooktime standard load static minutes	43	43	43	43	43	43	43	43	43	43
Cooktime standard load fan minutes	41	41	41	41	41	41	41	41	41	N/A
Energy consumption static kW/h	0.79	0.79	0.79	0.79	0.79	0.79	0.79	0.79	0.79	0.79
Energy consumption fan kW/h	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78	N/A
Standby power W	2	1	2	1	1	1	1	1	0	0
ELECTRICAL CONNECTION										
Connected load kW	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.1	2.1	2.5
Fuse rating A	13	13	13	13	13	13	13	13	13	13
Oven/Grill power (max) kW	2.5/1.65	2.5/1.65	2.5/1.65	2.5/1.65	2.5/1.65	2.5/1.65	2.5/1.65	2.1/1.65	2.1/1.65	2.5/1.65
SAFETY AND INTERFERENCE SUPPRESSION										
Low Voltage Directive (LVD)	■	■	■	■	■	■	■	■	■	■
Electromagnetic Compatibility (EMC)	■	■	■	■	■	■	■	■	■	■
LITERATURE SUPPLIED										
Operation and installation instructions	■	■	■	■	■	■	■	■	■	■
APPLIANCE DIMENSIONS										
Height mm	590	590	590	590	590	590	590	590	590	590
Width mm	594	594	594	594	594	594	594	594	594	594
Depth mm	560	560	560	560	560	560	560	560	560	560
Net weight Kg	31.9	34.1	33.8	35.5	34.1	34.2	38.1	30.8	29.8	29.8
APERTURE DIMENSIONS 1)										
Height* mm	580	580	580	580	580	580	580	580	580	580
Width mm	560	560	560	560	560	560	560	560	560	560
Depth mm	550	550	550	550	550	550	550	550	550	550
PACKAGING DIMENSIONS										
Height mm	660	660	660	660	660	660	660	660	660	660
Width mm	630	630	630	630	630	630	630	630	630	630
Depth mm	660	660	660	660	660	660	660	660	660	660
Gross weight Kg	33.4	35.6	35.3	37.0	35.6	35.7	39.6	32.3	31.3	31.3

1) Refer to User Instructions before cutting out
2) Pyrolytic cleaning : 5.0kW / h
* 593mm if built under worktop or hob for all models

COOKING

MODEL	BUILT-IN DOUBLE OVENS			BUILT-UNDER DOUBLE OVENS	
	ZOD995X	ZOD595N ZOD595W ZOD595X	ZOF695B ZOF695W ZOF695X	ZUB875N ZUB875W ZUB875X	ZUF270W ZUF270X
OVEN FUNCTIONS (t = top, m = main)	t | m	t | m	t | m	t | m	t | m
Thermaflow® fan operated cooking	| ■	| ■	| ■	| ■	| ■
Fan assisted cooking	-	-	-	■ |	-
Thermal grilling	| ■	| ■	-	■ | ■	-
Conventional cooking	■ | ■	■ |	■ |	■ | ■	■ |
Pizza setting	| ■	-	-	| ■	-
Booster	-	-	-	| ■	-
Fan controlled defrosting	| ■	| ■	| ■	■ | ■	| ■
80° Keep warm	| ■	-	-	-	-
Full width grill	■ | ■	■ | ■	■ |	■ | ■	■ |
Economy grill	■ | ■	■ | ■	■ |	■ | ■	■ |
Bottom heat - reheat	■ | ■	-	-	-	-
Top heat browning	-	-	-	-	-
OVEN FEATURES					
Oven door(s) (Q = quadruple T = triple, D = double)	D	D	D	D	D
Interior lights Watts	2 x 25	2 x 25	2 x 25	2 x 25	2 x 25
Interior lights Position	Sides	Sides	Sides	Sides	Sides
Digital Touch Controls	■	-	-	-	-
Digital Push Button Controls	-	-	-	-	-
Retractable controls	-	■	-	■	-
Rotary controls	-	-	■	-	■
Controls behind glass	-	■	-	-	-
Digital display	■	-	-	-	-
Digital Temperature Control	■	-	-	-	-
Compact hinge	■	■	■	■	■
Cooling fan	■	■	■	■	■
Easy installation - side handles and stability feet	-	-	-	-	-
PROGRAMMER					
Mechanical minute minder	-	-	-	-	-
Fully programmable electronic clock & minute minder	■	Main	Main	Main	Main
Digital controls with menu guided cooking	■	-	-	-	-
CLEANING					
Pyrolytic oven cleaning 2)	-	-	-	-	-
Catalytic lining / liners	■	■	-	■	■
Easy clean enamel interior	-	-	■	-	
Fold down grill	-	-	Top	-	-
EQUIPMENT SUPPLIED					
Telescopic runners	Optional	Optional	Optional	-	-
Chrome grid runners	■	■	■	■	■
Chrome auto-stop non-tip shelves	1 | 2	1 | 2	1 | 2	1 | 2	1 | 2
Grill pan	■	■	■	■	■
INTERNAL OVEN DIM. (t = top, m = main)					
Volume (usage) litres	31 | 53	31 | 53	31 | 57	35 | 49	38 | 53
Height mm	180 | 330	180 | 330	180 | 350	260 | 270	260 | 290
Width mm	420 | 420	420 | 420	420 | 420	345 | 445	345 | 445
Depth mm	405 | 385	405 | 385	405 | 385	385 | 410	425 | 410
ENERGY INFORMATION					
Oven temperature range °C	30-250	90-250	90-250	90-250	90-250
Energy class	B | A	B | A	B | A	A | B	A | B
Energy efficiency class in mode Static/Fan	S | F	S | F	S | F	F | S	S | F
Cooktime standard load static minutes	38 | 46	40 | N/A	42 | NA	46 | 51	41 | NA
Cooktime standard load fan minutes	NA | 50	NA | 49	NA | 42	42 | 60	NA | 56
Energy consumption static kW/h	0.68 | 0.89	0.72 | N/A	0.74 | NA	0.85 | 0.98	0.77 | NA
Energy consumption fan kW/h	NA | 0.79	NA | 0.79	NA | 0.79	0.79 | 1.05	NA | 0.99
Standby power W	1.2 | 1.2	0 | 1.1	0 | 1.1	0 | 1.1	0 | 1.1
ELECTRICAL CONNECTION					
Connected load kW	5.9	5.4	5.4	6.1	5.4
Fuse rating A	30	30	30	30	30
Oven/Grill power (max) kW	2.6/2.3	2.8/2.5	2.8/2.5	2.8/3.2	2.8/3.2
SAFETY AND INTERFERENCE SUPPRESSION					
Low Voltage Directive (LVD)	■	■	■	■	■
Electromagnetic Compatibility (EMC)	■	■	■	■	■
LITERATURE SUPPLIED					
Operation and installation instructions	■	■	■	■	■
APPLIANCE DIMENSIONS					
Height mm	897	897	897	720	720
Width mm	595	595	595	593	593
Depth mm	547	547	547	550	550
Net weight Kg	53.0	53.0	53.0	50.0	48.0
APERTURE DIMENSIONS 1)					
Height mm	875	875	875	720	720
Width mm	560	560	560	600	600
Depth mm	550	550	550	560	560
PACKAGING DIMENSIONS					
Height mm	965	965	965	800	800
Width mm	664	665	665	660	660
Depth mm	680	680	680	660	660
Gross weight Kg	55.0	55.0	55.0	52.0	50.0

1) Refer to User Instructions before cutting out
2) Pyrolytic cleaning : 5.0kW / h

PRODUCT SPECIFICATION

COOKING

MODEL	BUILT-IN SINGLE OVEN
	ZOB890X
OVEN FUNCTIONS (t = top, m = main)	
Thermaflow® fan operated cooking	■
Fan assisted cooking	-
Thermal grilling	■
Conventional cooking	■
Pizza setting	■
Booster	-
Fan controlled defrosting	■
80° Keep warm	-
Full width grill	■
Economy grill	-
Bottom heat - reheat	■
Top heat browning	■
OVEN FEATURES	
Oven door(s) (Q = quadruple T = triple, D = double)	T
Interior lights Watts	1 x 15 1 x 25
Interior lights Position	Sides
Digital Touch Controls	-
Digital Push Button Controls	-
Retractable controls	-
Rotary controls	■
Controls behind glass	-
Digital display	-
Digital Temperature Control	-
Compact hinge	■
Cooling fan	■
Easy installation - side handles and stability feet	-
PROGRAMMER	
Mechanical minute minder with end cooking function	-
Fully programmable electronic clock & minute minder	■
Digital controls with menu guided cooking	-
CLEANING	
Pyrolytic oven cleaning 2)	-
Catalytic lining/liners	■
Easy clean enamel interior	-
Fold down grill	-
EQUIPMENT SUPPLIED	
Telescopic runners	-
Chrome grid runners	■
Chrome auto-stop non-tip shelves	■
Grill pan	■
INTERNAL OVEN DIM. (t = top, m = main)	
Volume (usage) litres	70
Height mm	316
Width mm	555
Depth mm	381
ENERGY INFORMATION	
Oven temperature range °C	50-250
Energy class	A
Energy efficiency class in mode Static/Fan	F
Cooktime standard load static minutes	46
Cooktime standard load fan minutes	50
Energy consumption static kW/h	1.12
Energy consumption fan kW/h	0.99
Standby power W	2
ELECTRICAL CONNECTION	
Connected load kW	2.9
Fuse rating A	13
Oven/Grill power (max) kW	2.9/2.8
SAFETY AND INTERFERENCE SUPPRESSION	
Low Voltage Directive (LVD)	■
Electromagnetic Compatibility (EMC)	■
LITERATURE SUPPLIED	
Operation and installation instructions	■
APPLIANCE DIMENSIONS	
Height mm	474
Width mm	894
Depth mm	545
Net weight Kg	47.0
APERTURE DIMENSIONS 1)	
Height mm	460
Width mm	860
Depth mm	550
PACKAGING DIMENSIONS	
Height mm	585
Width mm	980
Depth mm	670
Gross weight Kg	53.0

1) Refer to User Instructions before cutting out
2) Pyrolytic cleaning : 5.0kW / h

COOKING

MODEL	MICROWAVE OVENS			
	ZMC40STX	ZMC30STQX	ZM266STGX	ZM266STW ZM266STN ZM266STX
MICROWAVE OVENS				
Combi microwave, fan oven & grill	■	■		
Microwave and grill			■	
Solo microwave				■
PERFORMANCE				
Microwave Output (IEC 705)	900W	1000W	900W	900W
Heating Category 1)	E	E	E	E
Grill Output	1300W	1550W	1000W	
Convection Oven Output	1450W	1500W		
FEATURES				
Fully Built-In	■	■	■	■
Triple glazed door	■			
Under counter installation	■			
In-column installation	■	■	■	■
Microwave Power Levels	5	6	5	5
Hinged Grill		■		
QUARTZ grill	■		■	
Electronic Push Controls	8	7	7	4
Control Knobs	2	1	1	1
Electronic Clock/ Programmer	■	■	■	■
Turntable Off Control		■		
Programme End Signal	■	■	■	■
Internal Light	■	■	■	■
Child Lock		■	■	■
Energy saving function	■			
COOKING MODES				
Microwave	■	■	■	■
Grill	■	■	■	
Microwave & Grill	■	■	■	
Convection (Fan)	■	■		
Microwave & Convection	■	■		
Defrost by Time		■		
Auto Defrost By Weight Programmes	7		4	4
Auto Cook By Weight Programmes	8	4	8	8
Quickstart	■		■	■
TECHNICAL				
Total Load Rating (kW)	2.95	3.00	2.40	1.30
Fuse	13	13	13	13
PRODUCT DIMENSIONS				
Oven Volume (litres)	40	30	26	26
Product Height (mm)	462	459	460	460
Product Width (mm)	592	595	592	592
Product Depth (mm)	537	560	437	437
Net weight (kg)	23.0	30.0	18.5	18.0
BUILT-IN DIMENSIONS 2)				
Built-in height (mm)	450	450	450	450
Built-in width (mm)	560	560	560	560
Built-in depth (mm)	550	600	500	500
PACKAGING DIMENSIONS				
Height (mm)	551	552	525	525
Width (mm)	695	660	660	660
Depth (mm)	630	620	535	535
Gross Weight (kg)	35.0	32.0	21.5	21.0

1) Heating category of the microwave oven in line with government guidelines
2) Installation aperture dimensions, for full details refer to installation guidelines

COOKING

MODEL	COFFEE MACHINES	
	Coffee Machine ZCOF636X	Accessory Drawer ZDRA600X
TECHNICAL DATA		
Connected Load (kW)	1.07	
Fuse Rating (Amps)	13	
Lamp	20W Halogen	
Working Pressure (Bar)	12	
PRODUCT DIMENSIONS		
Product Height (mm)	355	95
Product Width (mm)	594	594
Product Depth mm)	260	445
Net weight (kg)	17.6	6.8
BUILT-IN DIMENSIONS		
Built-in height (mm)	450	
Built-in width (mm)	563	
Built-in depth (mm)	600	
PACKAGING DIMENSIONS		
Height (mm)	425	135
Width (mm)	663	645
Depth (mm)	338	620
Gross Weight (kg)	19.0	8.0

COOKING

MODEL	TOUCH CONTROL GAS ON GLASS	GAS ON GLASS HOBS		GAS HOBS						
	ZGG7422EX	ZGG7822CX	ZGG6422CN ZGG6422CX	ZGF982CX	ZGF782CX	ZGM7821X	ZGF692CN ZGF692CW ZGF692CX	ZGF682X	ZGL622B ZGL622W ZGL622X	ZDG322X
HOB FEATURES										
Number of cooking zones	4	5	4	5	5	5	4	4	4	2
Ignition type	Integrated	Integrated	Integrated	Integrated	Integrated	Integrated	Integrated	Integrated	Integrated	-
Control position	Both Sides	Front	Side	Front	Front	Front	Front	Front	Side	Front
Control type	-	-	-	-	-	-	-	-	-	Rotary
Wok burner	-	-	-	■	■	■	■	■	-	
Safety thermocouples	■	-	-	-	-	-	-	-	-	
No. of stability fingers	4	4	4	8	8	10	10	4	8	
ZONE SPECIFICATION										
Front left spec 2)	S	SR	R	S	R	S	S	S	R	-
Front left rating 3) kW	1.0	1.9	2.9	1.0	3.0	1.0	1.0	1.0	3.0	-
Front left diameter mm	48	62	98	48	98	48	48	48	98	-
Front right spec 2)	R	S	S	R	S	SR	TC	TC	S	-
Front right rating 3) kW	2.9	1.0	1.0	3.0	1.0	2.0	4.0	4.0	1.0	-
Front right diameter mm	98	48	48	129	48	62	129	129	48	-
Rear left spec 2)	SR	SR	SR	SR	SR	R	SR	SR	SR	-
Rear left rating 3) kW	1.9	1.9	1.9	2.0	2.0	3.1	2.0	2.0	2.0	-
Rear left diameter mm	62	62	62	62	62	9.8	62	62	62	-
Rear right spec 2)	SR	SR	SR	SR	SR	SR	SR	SR	SR	-
Rear right rating 3) kW	1.9	1.9	1.9	2.0	2.0	2.0	2.0	2.0	2.0	-
Rear right diameter mm	62	62	62	62	62	62	62	62	62	-
Middle front spec 2)	-	R	-	TC	TC	TC	-	-	-	Gas
Middle front rating 3) kW	-	2.9	-	3.5	4.0	4.0	-	-	-	1
Middle front diameter mm	-	92	-	122	129	129	-	-	-	48
Middle rear spec	-	-	-	-	-	-	-	-	-	Gas
Middle rear rating kW	-	-	-	-	-	-	-	-	-	3
Middle rear diameter mm	-	-	-	-	-	-	-	-	-	98
ELECTRICAL CONNECTION										
Total rating (max.) 3) kW	7.7	9.6	7.7	11.5	12.0	12.1	8.0	8.0	8.0	
Fuse rating A	3	3	3	3	3	3	3	3	3	4
SAFETY AND INTERFERENCE SUPPRESSION										
Low Voltage Directive (LVD)	■	■	■	■	■	■	■	■	■	■
Electromagnetic Compatibility (EMC)	■	■	■	■	■	■	■	■	■	■
Gas Directive	■	■	■	■	■	■	■	■	■	-
LITERATURE SUPPLIED										
Operation and installation instructions	■	■	■	■	■	■	■	■	■	■
APPLIANCE DIMENSIONS										
Height (above worktop) mm	8	8	8	15	15	15	15	15	12	8
Width mm	740	680	580	860	680	580	580	580	580	290
Depth mm	510	510	510	510	510	510	510	510	500	510
Net weight Kg	15.0	16.5	10.5	18.3	15.0	11.5	13.3	13.5	8.2	4.5
APERTURE DIMENSIONS 1)										
Height mm	50	50	50	30	30	30	30	30	30	43
Width mm	710	560	550	830	560	560	560	560	550	270
Depth mm	470	480	470	480	480	480	480	480	470	490
PACKAGING DIMENSIONS										
Packaged height mm	148	148	140	148	148	150	148	148	120	120
Packaged width mm	785	785	640	985	785	790	685	685	670	400
Packaged depth mm	610	610	590	610	610	620	610	610	600	600
Gross weight Kg	15.7	18.0	11.0	19.0	15.8	12.0	13.9	15.0	8.8	4.9

1) Refer to User Instructions before cutting out
2) S=Simmer burner; R=Rapid burner; SR=Semi-Rapid; HS=High Speed burner; TC=Triple Crown burner
3) For gas conversion purpose 3.450 BTU = 1kW

PRODUCT SPECIFICATION

COOKING

MODEL		CERAMIC HOBS INDUCTION HOBS		TOUCH CONTROL HOBS			ROTARY CONTROL HOBS		SEALED PLATE HOBS		
		ZKT652DX	ZKT631DX	ZKT863LX	ZKT641H	ZKT621LX	ZKF661LX	ZKF641F ZKF641X	ZBE602W ZBE602X	ZEL63W ZEL63X	ZDE320X
HOB FEATURES											
Number of cooking zones		4	4	4	4	4	4	4	4	4	2
Control position		Right	Front	Front	Front	Front	Front	Front	Front	Side	Front
Control type		Touch	Touch	Touch	Touch	Touch	Rotary	Rotary	Rotary	Rotary	Rotary
Residual heat/Hob on indicator		■	■	■	■	■	■	■	■	■	■
Electronic timer		■	■	■	■	-	-	-	-	-	-
Child lock		■	■	■	■	■	-	-	-	-	-
Auto cut-off		■	■	■	-	-	-	-	-	-	-
No of booster zones		2	1	-	-	-	-	-	-	-	-
Stop + Go		-	-	-	-	-	-	-	-	-	-
Automatic heat up		-	■	■	■	-	-	-	-	-	-
Pot sensors		■	■	-	-	-	-	-	-	-	-
ZONE SPECIFICATION											
Front left spec 2)		I	I	D	HA	F	D	F	F	F	-
Front left rating 3)	kW	2.2 - 2.8	2.3 + 0.8	0.75 / 2.2	2.4	2.3	0.75 / 2.2	1.7	2.0	2.0	-
Front left diameter	mm	210	210	120 / 210	210	210	120 / 210	180	180	180	-
Front right spec 2)		I	I	HA	F	F	F	F	F	F	-
Front right rating 3)	kW	1.8 - 2.8	1.4	1.2	1.2	1.2	1.2	1.2	1.5	1.5	-
Front right diameter	mm	180	145	145	145	145	145	145	145	145	-
Rear left spec 2)		I	F	HA	F	F	F	F	F	F	-
Rear left rating 3)	kW	1.4	1.2	1.2	1.2	1.2	1.2	1.7	2.0	1.5	-
Rear left diameter	mm	140	145	145	145	145	145	180	180	145	-
Rear right spec 2)		I	D	O	D	F	D	F	F	F	-
Rear right rating 3)	kW	1.8	0.7 / 1.7	1.5 / 2.4	0.7 / 1.7	1.8	0.7 / 1.7	1.2	1.5	1.5	-
Rear right diameter	mm	180	120 / 180	170 x 265	120 / 180	180	120 / 180	145	145	180	-
Middle front spec											Fast solid plate
Middle front rating	kW										1
Middle front diameter	mm										145
Middle rear spec											Fast solid plate
Middle rear rating	kW										1.5
Middle rear diameter	mm										180
ELECTRICAL CONNECTION											
Total rating (max.)	kW	7.2	6.6	7.0	6.5	6.5	6.3	5.8	7.0	6.0	
Fuse rating	A	30	30	30	30	30	30	30	30	30	
SAFETY AND INTERFERENCE SUPPRESSION											
Low Voltage Directive (LVD)		■	■	■	■	■	■	■	■	■	■
Electromagnetic Compatibility (EMC)		■	■	■	■	■	■	■	■	■	■
Literature supplied											
Operation and installation instructions		■	■	■	■	■	■	■	■	■	■
APPLIANCE DIMENSIONS											
Height (above worktop)	mm	4	4	4	4	4	4	4	8	8	4
Width	mm	570	571	761	590	570	570	570	580	580	570
Depth	mm	500	501	501	520	500	500	500	510	500	500
Appliance weight	net kg	10.8	11.0	10.5	8.5	7.8	7.5	8.6	11.9	11.9	10.8
APERTURE DIMENSIONS 1)											
Height	mm	51	50	50	50	50	50	50	30	30	30
Width	mm	560	560	750	560	560	560	560	560	550	560
Depth	mm	490	490	490	490	490	490	490	480	470	490
PACKAGING DIMENSIONS											
Packaged height	mm	115	115	115	115	110	110	110	120	120	120
Packaged width	mm	745	680	865	745	665	665	665	670	670	400
Packaged depth	mm	575	575	575	575	570	570	570	600	600	600
Packaged weight	gross kg	11.6	12.0	12.5	8.7	8.6	8.5	10.6	12.5	12.5	4.9

1) Refer to User Instructions before cutting out
2) HA=HALOLIGHT zone; D=Dual Circuit zone; O=Oval multi-purpose zone; I=Induction; F=Fast plate/Fast zone
* Hob height: is height above worktop only

COOKING HOODS

MODEL		CHIMNEY HOODS												
		ZHC590X	ZHC955X	ZHC945X	ZHC916X	ZHC905X	ZHC705X	ZHC605X	CH8950X	CH8560X	CH8910X	CH8900K	CH710X	CH700X	CH8600K
SPECIFICATION															
Fan speeds		5	3	4	3	3	3	3	4	4	4	3	3	4	3
Control type		Push buttons	Slider	Push buttons	Push buttons	Slider	Slider	Slider	Push buttons	Push buttons	Push buttons	Push buttons	Push buttons	Push buttons	Push buttons
Electronic speed control		■	-	■	-	-	-	-	■	■	■	-	-	■	■
Intensive setting		■	-	■	-	-	-	-	■	■	■	-	-	-	-
Hob illumination (H = Halogen)	Watts	4x20 H	2x20 H	2x20 H	2x20 H	2x40	2x40	2x40	4x20 H	2x20 H	3x20 H	2x40	2x40	2x20 H	2x40
Extraction/recirculation operation		■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■	■ | ■
Saturation indication		-	-	-	-	-	-	-	-	-	-	-	-	-	-
Metal grease filter		■	■	■	■	■	■	■	■	■	■	■	■	■	■
INSTALLATION HEIGHT FROM:															
Electric hob	mm	650	600	650	650	650	650	650	650	650	650	600	650	600	600
Gas hob	mm	650	700	650	700	650	650	650	650	650	650	700	650	700	700
PERFORMANCE DATA															
Extraction ca.m3/h	max	570	420	480	550	400	400	400	460	460	460	430	390	400	430
Extraction ca.m3/h	intensive	660	-	550	-	-	-	-	550	550	550	-	-	-	-
Recirculation ca.m3/h	max	360	280	330	330	300	300	300	320	320	320	265	290	320	265
Recirculation ca.m3/h	intensive	410	-	360	-	-	-	-	360	360	360	-	-	-	-
Noise (max. setting)	extraction dB	65	62	65	59	61	61	61	62	62	62	64	61	62	64
	recirculation dB	67	66	67	60	60	60	60	67	67	67	66	60	64	66
ADDITIONAL EQUIPMENT REQUIRED:															
For ducting: Ventilation hose and wall box		■	■	■	■	■	■	■	■	■	■	■	■	■	■
Ventilation hose diameter *	mm	150#	150#	150#	120	150#	150#	150#	150#	150#	150#	120	150#	150#	120
For recirculation: Charcoal Filter		Included	Included	Included	Included	Included	Included	Included	Included	Included	Included	Included	Included	TYPE 160	Included
ELECTRICAL CONNECTION															
Connected load	Watts	410	214	245	215	230	230	230	285	245	265	230	230	210	230
Fuse rating	A	13	13	13	13	13	13	13	13	13	13	13	13	13	13
SAFETY AND INTERFERENCE SUPPRESSION															
Low Voltage Directive (LVD)		■	■	■	■	■	■	■	■	■	■	■	■	■	■
Electromagnetic Compatibility (EMC)		■	■	■	■	■	■	■	■	■	■	■	■	■	■
LITERATURE SUPPLIED															
Operation and installation instructions		■	■	■	■	■	■	■	■	■	■	■	■	■	■
APPLIANCE DIMENSIONS 1)															
Height for extraction	mm	935-1215	815-1065	918-1188	675-1075	800-1000	800-1000	800-1000	880-1060	940-1210	930-1200	875-1116	918-1188	785-1195	875-1116
Height for recirculation (if different)	mm		815-1125	918-1248					880-1120	940-1270	930-1260		918-1248		
Width	mm	370	898	898	898	898	698	598	898	898	898	899	598-698	698	599
Depth	mm	370	500	520	500	490	490	490	650	490	490	515	520	505	515
Net Weight	Kg	28.0	17.0	20.0	18.4	11.9	11.2	11.2	34.0	23.3	20.5	11.7	18.8	15.7	11.1
PACKAGING DIMENSIONS															
Height	mm	975	540	975	510	645	775	645	990	975	645	620	775	800	620
Width	mm	405	980	405	1110	980	405	680	760	405	1275	995	405	550	760
Depth	mm	645	610	546	670	410	645	410	525	645	405	390	645	625	390
Gross Weight	Kg	37.0	32.1	25.9	24.0	16.0	14.7	14.7	43.0	28.8	26.1	14.6	23.1	19.5	13.7

1) For installation aperture dimensions see installation instructions
120cm outlet adaptor included
*CDK5F
120mm (5") diameter flexible ducting kit. 1 metre length. 100mm (4") reduction collar included. For use with all hoods up to 1 metre ducting.
CDK5FR
120mm (5") diameter ducting kits for ducting of hoods situated away from exterior wall, up to 3 metres. 100mm (4") reduction collar included.

COOKING

HOODS	TELESCOPIC HOODS	CANOPY HOODS	INTEGRATED HOODS	STANDARD HOODS
MODEL	CH695TX	CH60296	ZHH600S	ZHT610B ZHT610N ZHT610W ZHT610X
SPECIFICATION				
Fan speeds	3	3	3	3
Control type	Push buttons	Slider	Slider	Slider
Electronic speed control	-	-	-	-
Intensive setting	■	-	-	-
Hob illumination (H=Halogen) Watts	2x20 H	2x40	2x40	2x40
Extraction/recirculation operation	■ | ■	■ | ■	■ | ■	■ | ■
Saturation indication	-	on filter	on filter	on filter
Metal grease filter	■	-	-	-
INSTALLATION HEIGHT FROM:				
Electric hob mm	400	650	650	650
Gas hob mm	650	700	650	700
PERFORMANCE DATA				
Extraction ca.m3/h max	390	280	210	250
Extraction ca.m3/h intensive	600	-	-	-
Recirculation ca.m3/h max	350	205	180	165
Recirculation ca.m3/h intensive	500	-	-	-
Noise (max. setting) extraction dB	55	56	62	61
recirculation dB	57	60	61	60
ADDITIONAL EQUIPMENT REQUIRED:				
For ducting: Ventilation hose and wall box	■	■	■	■
Ventilation hose diameter * mm	125	120	100	120
For recirculation: Charcoal Filter	Included	Included	Included	Included
ELECTRICAL CONNECTION				
Connected load Watts	310	175	190	190
Fuse rating A	13	13	13	13
SAFETY AND INTERFERENCE SUPPRESSION				
Low Voltage Directive (LVD)	■	■	■	■
Electromagnetic Compatibility (EMC)	■	■	■	■
LITERATURE SUPPLIED				
Operation and installation instructions	■	■	■	■
APPLIANCE DIMENSIONS 1)				
Height for extraction mm	450	200	350	129
Height for recirculation (if different) mm				
Width mm	596	520	598	598
Depth mm	300	285	270	450
Net Weight Kg	12.1	4.8	10.0	6.5
PACKAGING DIMENSIONS				
Height mm	500	290	695	510
Width mm	660	605	326	645
Depth mm	390	370	406	180
Gross Weight Kg	13.6	5.8	11.0	7.5

1) For installation aperture dimensions see installation instructions
120cm outlet adaptor included
*CDK5F
120mm (5") diameter flexible ducting kit. 1 metre length. 100mm (4") reduction collar included. For use with all hoods up to 1 metre ducting.
CDK5FR
120mm (5") diameter ducting kits for ducting of hoods situated away from exterior wall, up to 3 metres. 100mm (4") reduction collar included.

COOLING

MODEL	ZI9454X	ZI9189FFA	ZI921J8FFA	ZI9209KA	ZI9192/2KA	ZI9192/8KA
Format	4 Door Frost free Fridge Freezer Stainless Steel	Total No-frost 50:50 Fridge freezer	Frost free Fridge freezer	Fridge freezer	50:50 Fridge freezer	Fridge freezer
FRIDGE FEATURES						
Defrost	auto	auto	auto	auto	auto	auto
"Bacteria Safe System"	■	■	■	■	■	■
Electronic controls with LCD display		■				
SET Electronic controls	■		■			
SUPERCOOLING	■	■				
Electromechanical temperature controls				■	■	■
Adjustable thermostat coin/knob			Knob	Knob	Knob	Knob
Dairy compartment	2	■	■	■	■	■
Full width can shelves	4	2	2	2	2	2
1/2 width sliding shelf		■	■	■		
Bottle rack	2					
Bottle rack with grippers		■	■	■	■	■
MINI DAC/air circulation fan	■ / -	- / ■				
Glass shelves (full depth)	3	2	2	2	2	2
Glass shelves (half depth)	2	2	2	2	2	2
Flexible shelf positions	■	■	■	■	■	■
Large telescopic drawer with divider shelf for salad, veg etc.	■					
2 half width salad bins with full width glass cover		■	■	■	■	■
Interior light	2	■	■	■	■	■
Egg container	2	■	■	■	■	■
FREEZER FEATURES						
Frost Free	■	■	■			
Defrost - freezer	auto	auto	auto	manual	manual	manual
Electronic temperature controls	■	■	■			
Electronic controls with LCD display		■				
SUPERFREEZING	■	■				
On LED (Green)	■	In LCD display	■			
Fast Freeze Function with timed auto switch off	■	■	■			
Fast Freeze Function				■	■	■
Fast freeze LED (Yellow)	■	In LCD display	■			
High temperature warning LED (Red)	■	In LCD display				
High temperature warning audible buzzer	■	■				
Freezer compartments (flap/drawers)	0/4	0/4	0/3	0/3	0/4	0/2
Solid white freezer compartments	■	■	■	■	■	■
Freezer calendar	■	■	■	■	■	■
Ice cube tray	■	■	■	■	■	■
Ice scraper				■	■	■
OTHER FEATURES						
Adjustable feet	■					
Reversible Doors		■	■	■	■	■
100% CFC free	■	■	■	■	■	■
100% HFC free	■	■	■	■	■	■
Fridge freezer split		50:50	70:30	70:30	50:50	60:40
ENERGY EFFICIENCY INFORMATION						
Energy efficiency class*	B	A	A	A	A	A
Energy consumption kWh/year**	548	335	314	318	321	292
Noise, IEC 704-3, dB(A)	40	38	38	36	36	36
Gross capacity fridge litres (cu.ft)	342 (12.1)	164 (5.8)	214 (7.6)	214 (7.6)	173 (6.1)	173 (6.1)
Net capacity fridge litres (cu.ft)	338 (11.9)	162 (5.7)	210 (7.4)	210 (7.4)	170 (6.0)	170 (6.0)
Gross capacity freezer litres (cu.ft)	128 (4.5)	91 (3.2)	68 (2.4)	76 (2.7)	110 (3.9)	62 (2.2)
Net capacity freezer litres (cu.ft)	96 (3.4)	86 (3.0)	55 (1.9)	70 (2.5)	92 (3.3)	60 (2.1)
Frozen food rating	4 star	4 star	4 star	4 star	4 star	4 star
Power cut safe hours***	14	25	13	20	18	20
Freezing capacity kg/24hours	13	10	4	4	10	6
Climate class****	SN/T	SN/T	SN/ST	SN/ST	SN/ST	SN
ELECTRICAL CONNECTION						
Connected load (W)	240	160	160	120	160	100
Fuse rating (amps)	13	13	13	13	13	13
PRODUCT DIMENSIONS						
Height (mm)	1900	1767	1767	1767	1772	1436
Width (mm)	860	540	540	540	540	540
Depth (mm)	549	540	540	540	544	540
Net Weight (kg)	125.0	59.5	59.0	58.0	59.0	48.5
BUILT-IN DIMENSIONS						
Built-in height (mm)	1900	1780	1780	1780	1780	1446
Built-in width (mm)	860	560	560	560	560	560
Built-in depth (mm)	550	550	550	550	550	550
Door Fixing	Door on door	Slider	Slider	Slider	Slider	Slider
PACKAGING INFORMATION						
Height (mm)	2050	1850	1860	1860	1860	1860
Width (mm)	970	600	610	610	610	610
Depth (mm)	680	600	610	610	610	610
Gross Weight (kg)	148.0	64.0	64.0	63.0	64.0	52.0

Matt silver inclinable bottle rack for wine and large soft drink bottles - optional extra. Order BTLRACKS, suitable for all Zanussi fridge freezers

* Energy efficiency class based on a scale of A+ (most efficient) to G (least efficient)
** Based on standard test results for 24 hours in accordance with EN153. Actual consumption will depend on how the appliance is used and where it is located
*** Time for food temperature to rise from -18°C to -9°C with the power off and the door remaining closed
**** Climate class - the product is suitable for use in ambient temperatures of SN: 10-32°C, N:16-32°C, ST: 18-38°C, T: 18-43°C

PRODUCT SPECIFICATION

COOLING

MODEL	ZI9155A	ZI9121FA	ZI9225A	ZUD9154A	ZUD9100FA	ZUD9124A
Format	In-column larder fridge	In-column Freezer	In-column larder fridge	Under counter larder fridge	Under counter freezer	Under counter fridge with 4 star freezer
FRIDGE FEATURES						
Defrost	auto		auto	auto		auto
"Bacteria Safe System"	■		■	■		■
Electromechanical temperature controls	■		■	■		■
Adjustable thermostat coin/knob	Knob		Knob	Knob		Knob
Dairy compartment	■		■	■		■
Full width can shelves	2		2			
1/2 width sliding shelf				■		■
Bottle rack with grippers	■		■	■		■
Glass shelves (full depth)	2		4	2		1
Glass shelves (half depth)	2			2		2
Flexible shelf positions	■		■	■		■
Full width transparent salad bin with 2 half width hinged glass lids				■		■
2 half width salad bins with full width glass cover	■		■			
Interior light	■		■	■		■
Egg container	■		■	■		■
FREEZER FEATURES						
Defrost - freezer		manual			manual	manual
Electronic temperature controls		■			■	
Adjustable thermostat coin/knob		Knob			Knob	
On LED (Green)		■			■	
Fast Freeze Function with timed auto switch-off		■			■	
Fast freeze LED (Yellow)		■			■	
High temperature warning LED (Red)		■			■	
High temperature warning audible buzzer					■	
Door open warning audible buzzer					■	
Freezer compartments (flap/drawers)		1/3			0/4	1/0
Solid white freezer compartments		■			■	
Freezer calendar		■				
Ice cube tray		■			■	■
Ice scraper		■			■	■
OTHER FEATURES						
Adjustable feet				■	■	■
Reversible Doors	■	■	■	■	■	■
100% CFC free	■	■	■	■	■	■
100% HFC free	■	■	■	■	■	■
Matching fridge/freezer	ZI9121FA	ZI9155A		ZUD9100FA	ZUD9154A	
ENERGY EFFICIENCY INFORMATION						
Energy efficiency class*	A	A	A	A	A	A
Energy consumption kWh/year**	150	208	161	146	208	212
Noise, IEC 704-3, dB(A)	38	36	36	35	38	37
Gross capacity fridge litres (cu.ft)	158 (5.6)		230 (8.1)	142 (5.0)		105 (3.7)
Net capacity fridge litres (cu.ft)	154 (5.5)		228 (8.1)	140 (5.0)		103 (3.6)
Gross capacity freezer litres (cu.ft)		110 (3.9)			108 (3.8)	17 (0.6)
Net capacity freezer litres (cu.ft)		94 (3.3)			100 (3.5)	17 (0.6)
Frozen food rating		4 star			4 star	4 star
Power cut safe hours***		20			20	13
Freezing capacity kg/ 24hours		16			18	2.5
Climate class****	SN/ST	SN/ST	SN/ST	SN/ST	SN/ST	SN/ST
ELECTRICAL CONNECTION						
Connected load (W)	100	100	140	70	90	80
Fuse rating (amps)	13	13	13	13	13	13
PRODUCT DIMENSIONS						
Height (mm)	878	878	1218	815/865	815/865	815/865
Width (mm)	540	540	540	596	596	596
Depth (mm)	549	549	549	550	550	550
Net Weight (kg)	30.0	33.5	43.0	34.0	38.0	37.0
BUILT-IN DIMENSIONS						
Built-in height (mm)	880	880	1225	820/870	820/870	820/870
Built-in width (mm)	560	560	560	600	600	600
Built-in depth (mm)	550	550	550	550	550	550
Door Fixing	Slider	Slider	Slider	Door on door	Door on door	Door on door
PACKAGING INFORMATION						
Height (mm)	960	960	1300	880	880	880
Width (mm)	610	600	600	670	670	670
Depth (mm)	610	620	620	600	600	600
Gross Weight (kg)	33.0	36.0	46.0	37.0	41.0	40.0

Matt silver inclinable bottle rack for wine and large soft drink bottles - optional extra. Order BTLRACKS, suitable for in-column fridges only

* Energy efficiency class based on a scale of A+ (most efficient) to G (least efficient)
** Based on standard test results for 24 hours in accordance with EN153. Actual consumption will depend on how the appliance is used and where it is located
*** Time for food temperature to rise from -18°C to -9°C with the power off and the door remaining closed
**** Climate class - the product is suitable for use in ambient temperatures of SN: 10-32°C, N:16-32°C, ST: 18-38°C, T: 18-43°C

DISHWASHING

DISHWASHERS

MODEL	ZDI6896SX	ZDI6896QX	ZDI6053X ZDI6053N ZDI6053W	ZDI6764	ZDT6255	ZDT6053	ZDT5053
Capacity (number of IEC place settings)	12	12	12	12	12	12	9
CONTROLS							
Design	Soft-Tech	Quadro	Semi- integrated	Fully integrated	Fully integrated	Fully integrated	Slimline Fully integrated
Fuzzy Logic	■	■		■			
Electronic Controls	■	■	■	■	■	■	■
LED programme progress indicator			■				
Time to programme end display	■	■		■			
End of programme indicator	■	■		■	■	■	■
End of Programme Alarm				■	■	■	■
Delay Start	■	■		■	■		
Salt refill indicator	■	■	■	■	■	■	■
Rinse aid refill indicator	■	■		■	■		
Half load option				■			
Number of programmes	7	7	5	7	5	5	5
Number of temperature options	5	5	3	5	4	3	3
INTERIOR							
Upper basket height	Quick Lift	Quick Lift	Adjustable	Quick Lift	Adjustable	Adjustable	Adjustable
Cupshelves	4 foldable	4 foldable	2 foldable	4 foldable	4 foldable	2 foldable	3 (2 foldable)
Lower Basket Plate Racks	4 foldable	4 foldable	Fixed	4 foldable	2 foldable	Fixed	Fixed
Basket Handles	Delta Silver	Delta Silver	Wire	Delta Silver	Delta Grey	Wire	Wire
Cutlery basket	Delta Silver	Delta Silver	Delta Grey	Delta Silver	Delta Grey	Delta Grey	Delta Grey
Automatic rinse aid dispenser	■	■	■	■	■	■	■
Automatic detergent dispenser	■	■	■	■	■	■	■
Anti flood Device	■	■	■	■	■	■	■
Drying with hidden heater	Active	Active	Residual	Active	Active	Residual	Residual
Stainless steel interior	■	■	■	■	■	■	■
INSTALLATION FEATURES							
Cold water fill	■	■	■	■	■	■	■
Water pressure min/max (psi)	7/110	7/110	7/110	7/110	7/110	7/110	7/110
Equipoise door	■	■	■	■	■	■	■
Double fulcrum hinge	■	■		■			
Drawer-line adjustment			30mm				
Worktop steam protection	Metal Bar	Metal Bar	Aluminium Foil	Metal Bar	Aluminium Foil	Aluminium Foil	Aluminium Foil
Top & side fixing brackets	■	■	■	■	■	■	■
Recessed plinth	■	■	■	■	■	■	■
Feet - 3 (front adjustment block)	■	■	■	■	■	■	■
ENERGY EFFICIENCY INFORMATION							
Energy efficiency class***	A	A	A	A	A	A	A
Energy consumption (kWh)*	1.05	1.05	1.05	1.05	1.05	1.05	0.8
Wash performance***	A	A	A	A	A	A	A
Drying performance***	A	A	B	A	B	B	B
Noise dB(A) to IEC 704-3	45 dba	45 dba	53dba	47 dba	49dba	53dba	53dba
Programme time (mins)****	150	150	150	160	160	160	130
Water consumption (litres/cycle)	14	14	18	15	16	18	14
Average annual energy consumption (kWh/year)**	231	231	231	231	231	231	176
Average annual water consumption (litres/year)**	3080	3080	3960	3300	3520	3960	3080
ELECTRICAL CONNECTION							
Connected load (kW)	2.2	2.2	2.2	2.2	2.2	2.2	2.2
Fuse rating (amps)	13	13	13	13	13	13	13
PRODUCT DIMENSIONS							
Height (mm)	818-878	818-878	818-878	818-878	818-878	818-878	818-878
Width (mm)	596	596	596	596	596	596	446
Depth (mm)	575	575	575	555	555	555	555
Net Weight (kg)	45.7	45.7	38	40	39	38	33
FURNITURE DOOR DIMENSIONS							
Height (mm)	120-150	120-150	590 max	644-714	644-714	644-714	644-714
Width (mm)	596	596	596	596	596	596	446
Weight (kg)n/a*****	n/a*****	n/a*****	2.0-7.5	2.0-7.5	2.0-7.5	2.0-7.5	2.0-6.0
PACKAGING DIMENSIONS							
Height (mm)	910	910	910	910	910	910	910
Width (mm)	650	650	650	650	650	650	500
Depth (mm)	680	680	680	680	680	680	680
Gross Weight (kg)	47.7	47.7	40	42	41	40	35

* Energy consumption is stated in kWh per standard test cycle, using cold water fill. Actual consumption will depend on how the appliance is used.
** Estimated annual consumption based on 220 washing cycles.
*** Models with an 'A' rated classification offer a higher performance than those with a 'G' rating.
**** Time taken for a standard test cycle, using cold water fill.
***** These models need a false drawer panel to be fitted below the stainless steel door (similar to the infill panel located below the under counter single oven).

LAUNDRY

		WASHING MACHINES		WASHER DRYER
MODEL		ZI1218	ZT1012	ZID12191
Wash system		Jetsystem	Aquacycle	Jetsystem
Wash capacity	kg	5	5	5
Dry capacity	kg			2.5
Spin speed	rpm	1200	1000	1200
CONTROLS				
LED display		■		■
Electronic controls		■		■
Rotary controls		1	2	1
Push buttons		9	2	9
Programme progress LEDs		■		■
Delay timer		■		■
Display for programme time, delay time and countdown to programme end		■		■
PROGRAMMES				
Cottons/linens		■	■	■
Cotton economy		■		■
Synthetics		■	■	■
Easy iron		■		■
Delicates		■	■	■
Wool		■	■	
Handwash				■
Mini 30 minutes		■		■
Worn once 30°			■	
Additional programmes		■		■
2 temperature drying				■
OPTIONS				
Quick wash		■	■	■
Temperature selection/cold wash			■	
Spin speed reduction/rinse hold		■		■
Prewash		■		■
Extra Rinse		■		■
Daily wash		■		■
Easy Ironing		■		
Drying time				■
FEATURES				
Large porthole		■	■	■
Wide door opening		■	■	■
EU ENERGY EFFICIENCY INFORMATION				
Wash/spin only				
Energy Class (wash/spin only)[1]		A+	B	A+
Energy consumption[2]	kWh/cycle	0.85	1.15	0.85
Average annual energy consumption[4]	kWh/year	170	230	170
Water consumption[2]	litres/cycle	49	59	49
Average annual water consumption[4]	litres/year	9800	11800	9800
Washing programme time[2]	mins	145	140	145
Washing performance (A-G)[2]		A	B	A
Spin efficiency (A-G)[2]		B	C	B
Water extraction efficiency	%	53	60	53
Wash/spin/dry - always using the dryer				
Energy Class (wash/spin/dry)[1]				C
Energy consumption[3]	kWh/cycle			4.45
Average annual energy consumption[5]	kWh/year			890
Water consumption[3]	litres/cycle			120
Average annual water consumption[5]	litres/year			24000
Washing programme time[3]	mins			235
Washing performance				A
Water extraction efficiency	%			53
ELECTRICAL AND WATER CONNECTION				
Voltage/frequency	Volts/Hz	240/50	240/50	240/50
Connected load	Watts	2050	2050	2050
Fuse rating	A	13	13	13
Water fill		Cold	Cold	Cold
APPLIANCE DIMENSIONS				
Height	mm	820	820	820
Width	mm	600	600	600
Depth	mm	541	541	541
Net weight	kg	73.3	67.3	78.3
BUILT-IN DIMENSIONS *				
Built-in height	mm	820	820	820
Built-in width	mm	600	600	600
Built-in depth	mm	600	600	600
PACKAGED DIMENSIONS				
Height	mm	900	900	900
Width	mm	640	640	640
Depth	mm	650	650	650
Gross weight	kg	75.5	69.5	80.5

*** PD10 kit for 50mm extra height - optional extra**

1) Models with an 'A' rated classification offer a higher performance than those with a 'G' rating
2) Based on standard test results for 60°C cotton cycle
3) Based on standard test results for 60°C cotton cycle and "dry cotton" drying cycle
4) Average annual consumption for a 4 person household based on 200 standard 60°C cotton cycles, never using the dryer
5) Average annual consumption for a 4 person household based on 200 standard 60°C cotton cycles, always using the dryer

THE APPLIANCE OF SCIENCE ZANUSSI

Electrolux

INSTALLATION DIAGRAMS

INSTALLATION DIAGRAMS

SINGLE OVEN
ZOB160 / ZBF260 / ZBF360 / ZBF560
ZBF569S / ZBQ465 / ZBQ865 / ZBP1165



SOFT TECH SINGLE OVEN
ZBS1063



DOUBLE OVEN
WITH EYE LEVEL GRILL
ZDF290 / ZDQ595 / ZDQ995



Minimum distance between cabinet drawers 907mm

DOUBLE BUILT UNDER OVEN
ZUF270 / ZUQ875



90cm MULTI-FUNCTION OVEN
ZOB890

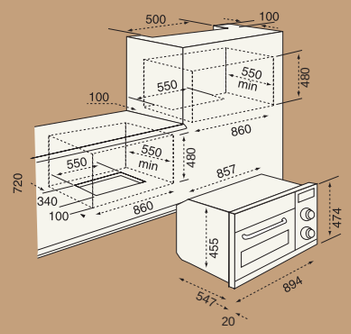

MICROWAVE
ZMC40STX



MICROWAVE
ZMC40STX



MICROWAVE
ZMC30STQ

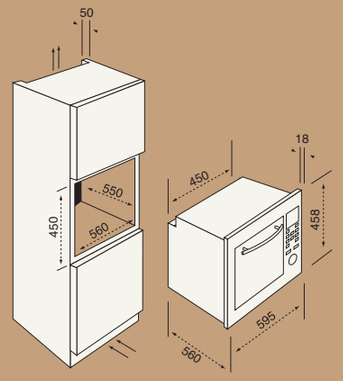

**280cm² ventilation gap required

MICROWAVE
ZM266ST / ZM266STG



* A clearance of 5mm is required between top of front frame and bottom of cupboard door above.

** The 5mm overlap is achieved when using the 360mm "feet". To use the 360mm high niche, the feet must be changed as per the instruction book.

Refer to user instruction book supplied with product for full installation details.

74cm 5 BURNER TOUCH CONTROL GAS ON GAS HOB
ZGG742E



60cm HOBS WITH SIDE CONTROL
ZGL62i / ZEL63



60cm GAS ON GLASS HOB
ZGG642

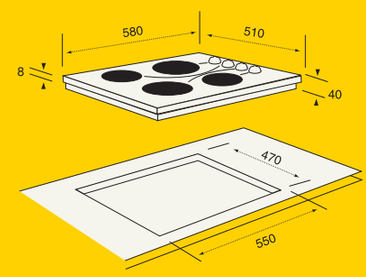

60cm HOBS WITH FRONT CONTROLS
ZGF682 / ZGF692C

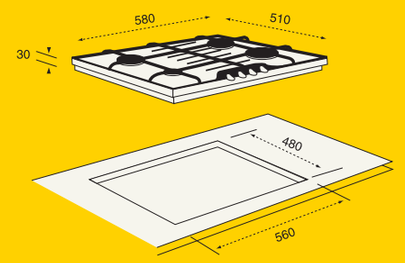

70cm GAS ON GLASS HOB
ZGG782C

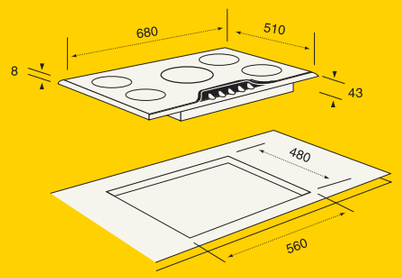

70cm 5 BURNER HOB
ZGF782C / ZGM782i

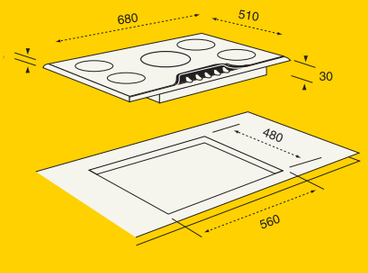

90cm 5 BURNER HOB
ZGF982C

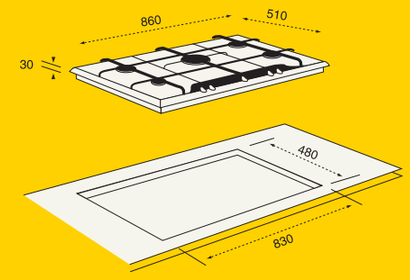

60cm SOLID PLATE HOB WITH FRONT CONTROLS
ZBE602

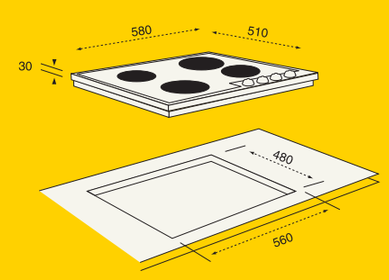

60cm 2 ZONE SOLID PLATE HOB
ZDE320X

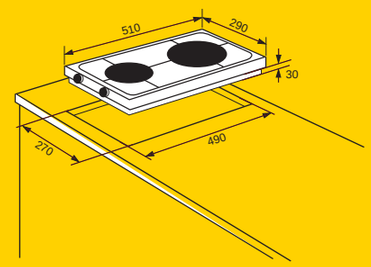

CERAMIC HOBS
ZKF641 / ZKF661L / ZKT621L / ZKT641H / ZKT863L

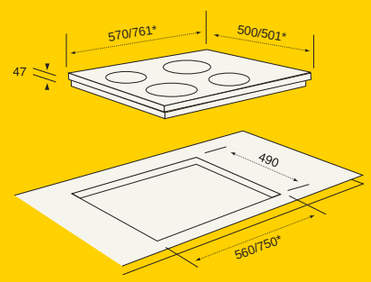

INDUCTION HOBS
ZKT631D / ZKT652D

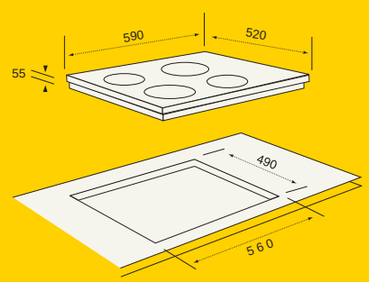

Refer to user instruction book supplied with product for full installation details.

INSTALLATION DIAGRAMS

STAINLESS STEEL ISLAND HOOD
ZHC590



* Ducting diameter 120mm - 150mm.

90cm STAINLESS STEEL CHIMNEY HOOD
ZHC955



* Ducting diameter 120mm - 150mm.

90cm STAINLESS STEEL CHIMNEY HOOD
ZHC945

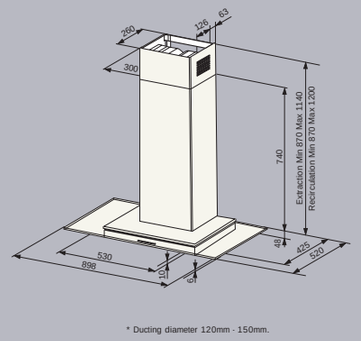

* Ducting diameter 120mm - 150mm.

70cm STAINLESS STEEL CHIMNEY HOOD
CH710

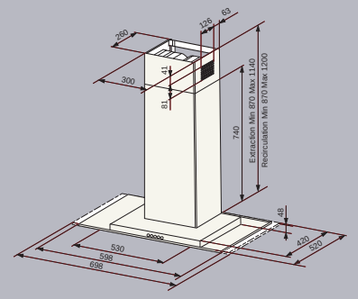

* Ducting diameter 120mm - 150mm.

70cm CHIMNEY HOOD
CH700

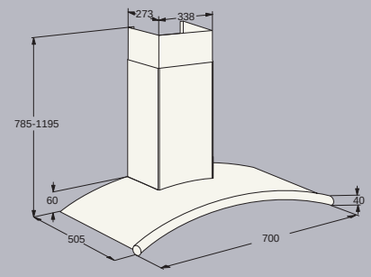

* Ducting diameter 120mm - 150mm.

90cm STAINLESS STEEL CHIMNEY HOOD
ZHC916

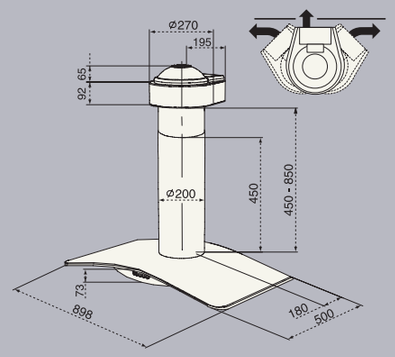

* Ducting diameter 120mm.

60cm, 70cm and 90cm STAINLESS STEEL CHIMNEY HOODS
ZHC605 / ZHC705 / ZHC905

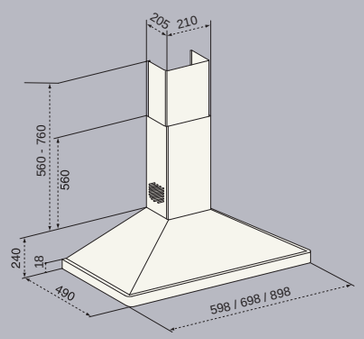

* Ducting diameter 120mm - 150mm.

90cm STAINLESS STEEL CHIMNEY HOOD
CH950X



* Ducting diameter 120mm - 150mm.

90cm STAINLESS STEEL CHIMNEY HOOD
CHi950X

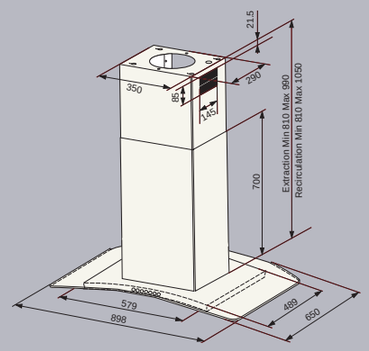

* Ducting diameter 120mm - 150mm.

90cm STAINLESS STEEL CHIMNEY HOOD
CH910

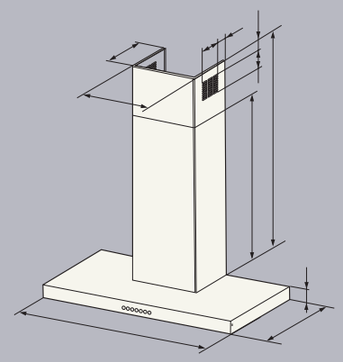

* Ducting diameter 120mm - 150mm.

52cm INTEGRATED CANOPY HOOD
CH6029

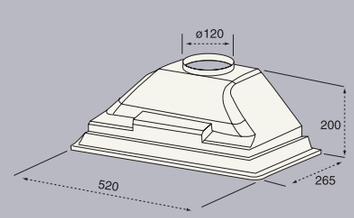

60cm INTEGRATED COOKER HOOD
ZHi600



60cm TRADITIONAL COOKER HOOD
ZHT610

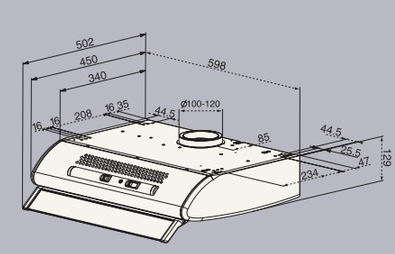

100mm DIAMETER, 3 METRE DUCTING KIT
CDK2FR

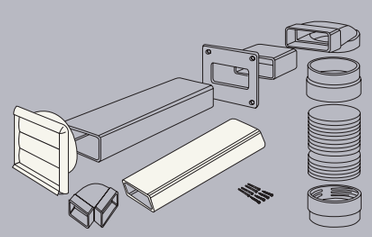

100mm (4”) diameter ducting kit for ducting of hoods situated away from exterior wall up to 3 metres.
For use with ZM280 and ZB350 Zanussi hoods.

120mm DIAMETER, 1 METRE DUCTING KIT
CDK5F



120mm (5”) diameter flexible ducting kit.
1 meter length. 100mm (4”) reduction collar included.
For use with all Zanussi hoods up to 1 metre ducting.

120mm DIAMETER, 3 METRE DUCTING KIT
CDK5FR

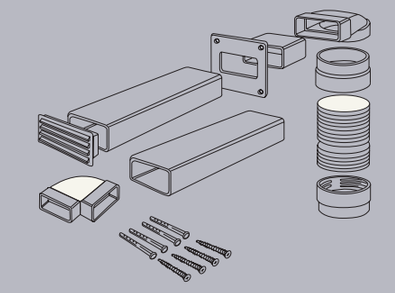

120mm (5”) diameter ducting kit for ducting of hoods situated away from exterior wall up to 3 metres.
100mm (4”) reduction collar included.
For use with all Zanussi hoods.

Refer to user instruction book supplied with product for full installation details.

Refer to user instruction book supplied with product for full installation details.

INSTALLATION DIAGRAMS

QUATTROPORTE®
Zi9454

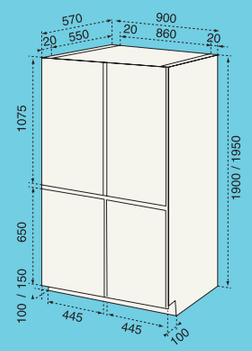

IN-COLUMN TOTAL NO-FROST COMBI FRIDGE FREEZER
Zi918/9FFA

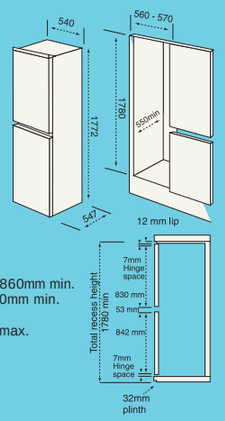

Furniture doors
Height (top door) - 860mm min.
(Bottom door) - 900mm min.
Width - 596mm
Thickness - 20mm max.

IN-COLUMN FRIDGE FREEZER
Zi920/9KA / Zi921/8FFA

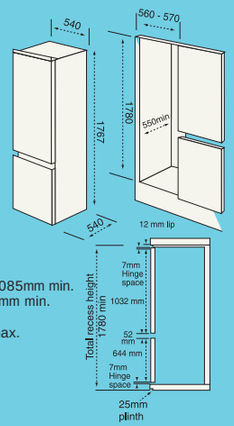

Furniture doors
Height (top door) - 1085mm min.
(Bottom door) - 710mm min.
Width - 596mm
Thickness - 20mm max.

IN-COLUMN FRIDGE FREEZER
Zi918/12KA

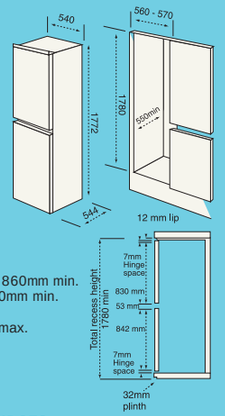

Furniture doors
Height (top door) - 860mm min.
(Bottom door) - 900mm min.
Width - 596mm
Thickness - 20mm max.

IN-COLUMN FRIDGE FREEZER
Zi918/8KA

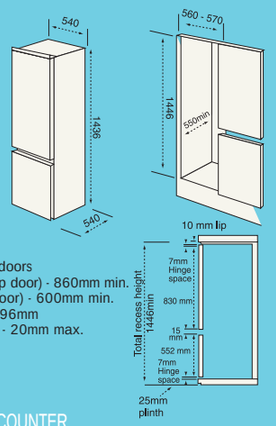

Furniture doors
Height (top door) - 860mm min.
(Bottom door) - 600mm min.
Width - 596mm
Thickness - 20mm max.

IN-COLUMN LARDER FRIDGE AND FREEZER
Zi9155A / Zi9121FA



Furniture door
Height - 890mm min.
Width - 596mm min.
Thickness - 20mm max.

IN-COLUMN FRIDGES
Zi9225A



Furniture door
Height - 1235mm
Width - 596mm
Thickness - 20mm max.

UNDER COUNTER FRIDGES AND FREEZERS WITH DOOR-ON-DOOR FITTINGS
ZUD9100FA / ZUD9154A / ZUD9124A



Furniture door
Height - 715mm min.
Width - 596mm
Thickness - 20mm max.

Refer to user instruction book supplied with product for full installation details.

60cm DISHWASHERS
ZDi6896S / ZDi6896Q

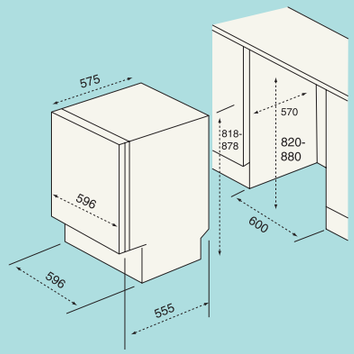

SEMI-INTEGRATED DISHWASHER
ZDi6053

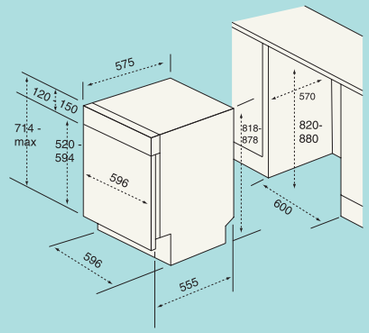

45cm FULLY INTEGRATED SLIMLINE DISHWASHER
ZDT5053

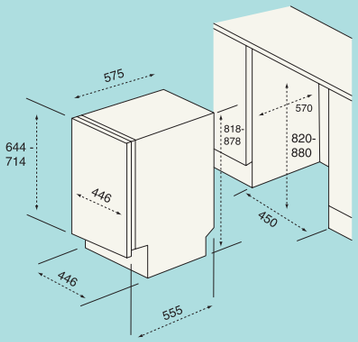

60cm FULLY INTEGRATED DISHWASHER
ZDT6764 / ZDT6255 / ZDT6053

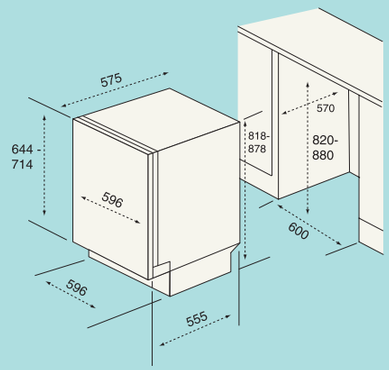

COFFEE MAKER
ZCOF636 with ZDRA600

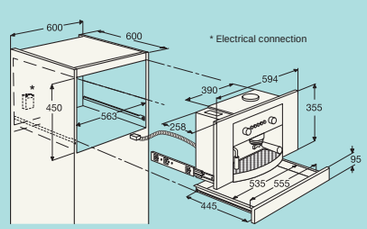

INTEGRATED LAUNDRY
ZT1012 / ZJ1218 / ZJD12191

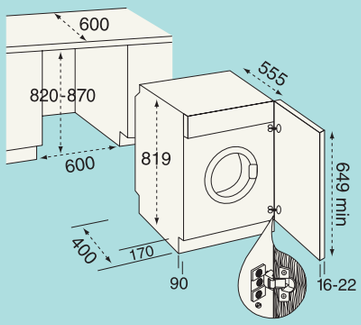

LAUNDRY INSTALLATION
ZT1012 / ZJ1218 / ZJD12191

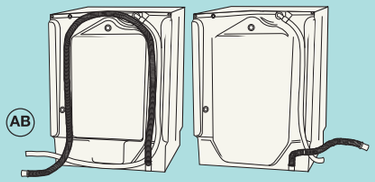

When installing the appliance into the kitchen furniture ensure, if possible, the hoses are placed in either of the two recesses on the back of the appliance. This will help to prevent the hoses from becoming kinked or trapped.

FURNITURE HINGE POSITIONS
ZT1012 / ZJ1218 / ZJD12191



Refer to user instruction book supplied with product for full installation details.

ENERGY EFFICIENCY information

This scheme, which covers refrigerators, freezers, washing machines, tumble dryers, dishwashers and electric ovens is designed to offer consumers a standardised method of choosing the most energy efficient appliances. For refrigerators and freezers, as well as stating the Energy Efficiency Class ('A+' - most efficient, 'G' - least efficient) the label also gives the annual electricity consumption (i.e. running cost) and the usable storage capacity. For washing machines the label also states the wash performance and spin efficiency. Three ratings are given to ensure energy efficiency combined with effective washing and drying. For dishwashers the label states energy efficiency, washing and drying performance. For electric ovens the label also states the energy consumption (in kWh) and the usable volume of the oven. If the oven is a double oven it will carry this information for both ovens.

2220074-01

Energy

Manufacturer ZANUSSI

Model ZUD9124A

More efficient

A

B

C

D

E

F

G

Less efficient

A

Energy consumption kWh/year *(Based on standard test results for 24 h)* Actual consumption will depend on how the appliance is used and where it is located	212.00
Fresh food volume |	103
Frozen food volume |	17
	****
Noise (dB(A) re 1 pW)	

Further information is contained in product brochures.

Norm EN 153 May 1990
Refrigerator Label Directive 94/2/EC

A appliance with low energy consumption

B

C

D appliance with medium energy consumption

E

F appliance with high energy consumption

G

Many products in the Zanussi- Electrolux range are 'A' rated and endorsed by the Energy Savings Trust with an Energy Efficiency Recommendation. The award by this independent body is made only to the most energy efficient appliances on the market.

AFTER SALES support

CUSTOMER CARE - TELEPHONE (08705) 727727

SERVICEFORCE

Service Force Network

Telephone (08705) 929929
www.serviceforce.co.uk

RESPONSIVE CUSTOMER CARE/AFTER SALES SERVICE

Once you've bought a Zanussi-Electrolux appliance you're safe in the knowledge that in the unlikely event of a fault occurring you can rely on a commitment to look after your appliance throughout its working life. Over five hundred manufacturer trained service engineers are available nationwide and our complete care service is one of the most extensive and reliable available.

12 MONTHS PARTS AND LABOUR GUARANTEE

In the unlikely event of any repairs being required in the first year, we will carry them out free of charge. In addition, any repairs carried out after the guarantee period are covered by their own 12 month guarantee*.
*Guarantee conditions provided on request

RAPID SERVICE

If you call us out under the 12 month guarantee, we endeavour to fix the appliance within seven working days of our first call.

LOCAL SERVICE NATIONWIDE

Backed by the extensive range of spare parts held by our central warehouse, the Service Force Network will endeavour to repair your product in your home within 72 hours of receipt of the original call.*

* Excludes Saturdays, Sundays and Bank holidays, and may not be available in rural or outlying areas.

SERVICE BY APPOINTMENT

To allow you to plan your day we can offer an appointment within a 3 hour time period, when the call is booked two days in advance.*

We can also provide service outside of office hours and Saturday mornings.**

* Please note. The service pledge does not apply in the Republic of Ireland.
** A small extra charge is payable for this service.

MARKETING POLICY

The policy of Zanussi-Electrolux Domestic appliances is one of continued improvement. We therefore reserve the right to alter or amend specifications/dimensions without notice. All specifications/dimensions including installation dimensions should be checked with the appropriate instruction booklet before use or installation. If in doubt, contact your local Zanussi-Electrolux stockist who regularly receives up to date product information from our marketing department. E and O.E.

Electrolux Major Appliances
Addington Way,
Luton,
Bedfordshire,
LU4 9QQ
Telephone: 08705 950 950
www.zanussibuiltin.co.uk
Registered in England No. 2331516.

Electrolux Ireland
Long Mile Road
Dublin 12
Telephone: 00353 1 409 750
www.zanussibuiltin.co.uk
Registered in Ireland No. 9118.

ZANEL/1186/0406/04

THE APPLIANCE OF SCIENCE

ZANUSSI

Electrolux